




Surface Quality Monitors - SQM500W

Surface Quality Monitors Model: SQM500W

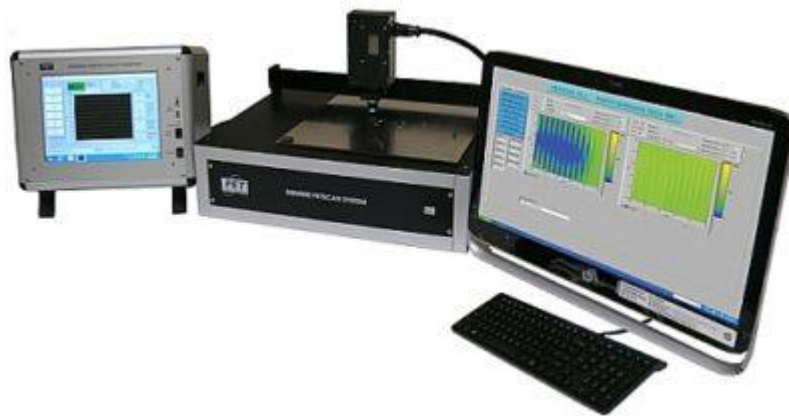

Please click on image for a larger view.

FEATURES:

TURN-KEY SYSTEM

The SQM500W is a fully integrated 3-D color graphics data computer, a motorized X-Y scanning stage (6" X 6" Travel) with 2-Axis controller, color printer and a SQM200W Surface Quality Monitor. All scanning and data acquisition is controlled by PETSCAN™ software.

The system can be used to scan a flat sample surface and acquire

The system can be used to scan a flat sample surface and acquire data using any analog sensing device. It displays graphics in both color map and 3-D Topo map formats, with the ability to print out a color hard copy. The data can also be printed out, in a matrix format, listing the X,Y position and associated signal value.

SOFTWARE FEATURES DESCRIPTION

Scanning

Enables the user to scan any flat sample surface, acquire data and display a color map on the monitor. The user can define the number

of data points to be collected in the X and Y directions, and the stepsize (the distance between data point). All scan parameters are automatically saved and recalled to scan additional parts or re-scan the same part after some surface treatment. This feature is helpful in visualizing the effect of any treatment/changes to the surface.

Color Graphics Display

An interactive color graphics mode allows rapid visual analysis of the data. In this mode, the user has the ability to PAN and ZOOM onto a portion of the color map. The ZOOM portion can also be saved as a file. Two color maps can be displayed simultaneously to visually compare any two scans. This enables the user to visually analyze the effect of any treatment or the variation in two parts. Another feature is the ability to normalize, i.e., subtract point-by-point, one file from another. The resultant file is displayed in a 3D type format.

A 3-D Topo map of the data can also be displayed on the screen. In this display mode, the user has the ability to tilt and rotate the image, and set the Z-axis scale factor to visually enhance differences in the surface characteristics.

Analog to Digital Conversion

An analog input of 0-5 VDC is standard for the system. Other ranges of DC signal can be accepted with a minor modification, done at no additional cost. The SQM500W can accommodate any

instrumentation that has an output which ranges within the standard or modified analog signal range.


Report Generation

Any graphic image displayed on the screen can be printed on the color printer, which comes complete with the system. All scan parameters are also printed automatically. It is also possible to print all sensor data values, along with their corresponding X-Y position. The high, low, mean, and standard deviation of the scan are also printed out.



[SiteMap](#) | [Privacy Policy](#)

[Terms & Conditions](#)



Bảo mật · Điều khoản

[Home](#)

[About Us](#)

[Our Distributors](#)

[Products](#)

[Technical Documentation](#)

[Contact Us](#)

[Tradeshows & Events](#)

Contact Info

6085 King Drive Unit 104
Ventura, CA 93003

Phone: (805) 482-5200

Fax: (805) 482-5252

pet@photoemission.com

© Photo Emission Tech, Inc. 2022 | Built by MK